

TUBOMATIC H83/E EL

Code: TUBH83/EEL


CRIMPING (STANDARD VOLUME CRIMPING)



TUBOMATIC H83/E PM

Code: TUBH83/EPM


CRIMPING (STANDARD VOLUME CRIMPING)

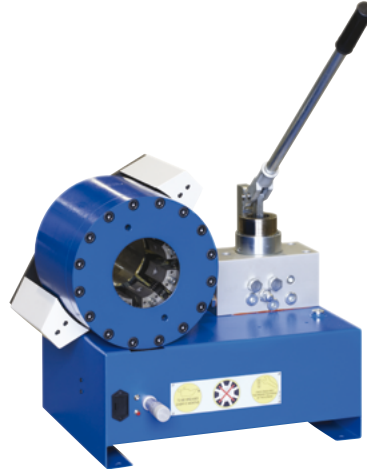

TUBOMATIC H83/E PI

Code: TUBH83/EPI

CRIMPING (STANDARD VOLUME CRIMPING)

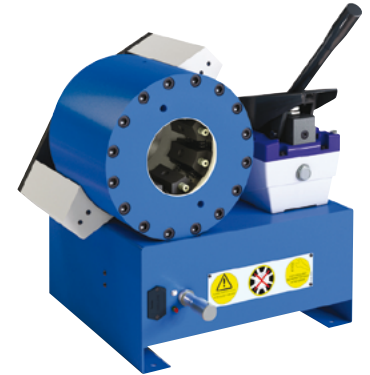

MAIN FEATURES



Ideal for any type of fitting



Electro-mechanical control



Vernier dial



Manual pump



Pneumo-hydraulic pump



Ideal for your workshop

H83/E EL

H83/E EL

H83/E PM

H83/E PI

TECHNICAL DATA

	H83/E EL	H83/E PM	H83/E PI
CRIMPING FORCE	150 US TONS	150 US TONS	150 US TONS
6 SPIRALS 2 PIECES	1"	1"	1"
4 SP 2 PIECES	1" 1/2*	1" 1/2*	1" 1/2*
4 SH 2 PIECES	1" 1/4	1" 1/4	1" 1/4
MAX Ø	64 mm (2.5") [†]	64 mm (2.5") [†]	64 mm (2.5") [†]
DIE OPENING	Ø + 1.6"	Ø + 1.6"	Ø + 1.6"
90° FITTINGS	1" 1/4*	1" 1/4*	1" 1/4*
STANDARD VOLTAGE	Any 60HZ 3PH/1PH	-	-
MOTOR POWER	3 Kw (4 Hp)	-	-
DIMENSIONS LxWxH	23.2"x23.2"x21.2"	23.6"x17.5"x18.7"	18.7"x18.7"x22"
WEIGHT WITHOUT OIL	264 Lbs	187 Lbs	180 Lbs
REQUIRED EFFORT ON THE LEVER	-	44 Lbs	-
CYLINDER	SINGLE EFFECT	SINGLE EFFECT	SINGLE EFFECT
OIL	30 Lt. (8 US gal) not included	5 Lt. (1 US gal) included	3 Lt. (0.8 US gal) included

ACCESSORIES

		H83/E EL	H83/E PM	H83/E PI
PORTABLE DISPENSER + PATENTED QUICK CHANGE		■	■	■
DISPENSER + PATENTED QUICK CHANGE		■	-	-
BASE		■	-	-
ELECTRIC PEDAL		■	-	-

Diameter (mm) ▶	10	12	14	16	19	22	25	29	34	38	42	46
H83/E EL H83/E PM - H83/E PI	DIES LENGTH (mm)											
	60	60	60	60	60	60	60	70	70	85	85	85

* WITH SPECIAL DIES Ø 54 MM UPON REQUEST - • WITH SPECIAL DIES
ALL CAPACITIES INDICATED DEPEND ON THE KIND OF FITTING USED

Product specifications could be modified without prior notice.