




TUBOMATIC H135 24V/12V

Code: TUBH13524V / TUBH13512V


CRIMPING (STANDARD VOLUME CRIMPING)

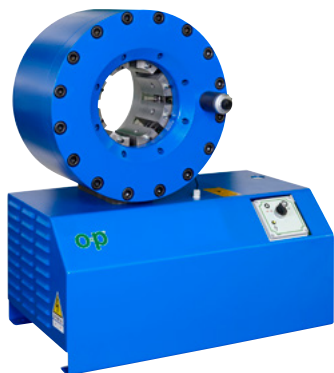

TUBOMATIC H130 24V/12V

Code: TUBH13024V / TUBH13012V

CRIMPING (STANDARD VOLUME CRIMPING)

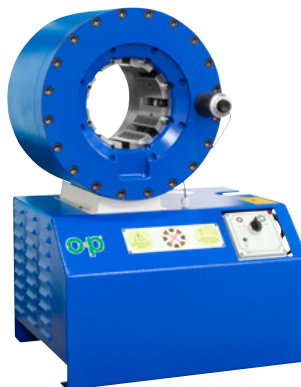

TUBOMATIC H83/E 12V

Code: TUBH83/E12V

CRIMPING (STANDARD VOLUME CRIMPING)



MAIN FEATURES



Ideal for any type of fitting



24V - 12V



Back limit switch



LED indicating when the set crimping diameter is reached



Vernier dial



Electro-mechanical control



Ideal for on-site service

H135 24V
H130 12V

H135 24V

TECHNICAL DATA - DATI TECNICI			
	H135 12V/24V	H130 12V/24V	H83/E 12V
CRIMPING FORCE	347 US TONS	280 US TONS	150 US TONS
6 SPIRALS 2 PIECES	2"	1" 1/4	1"
4 SP 2 PIECES	-	2"	1" 1/2*
4 SH 2 PIECES	-	-	1" 1/4
INDUSTRIAL HOSE	3"	3"	-
MAX Ø	111 mm (4.3") [†]	113 mm (4.4") [†]	64 mm (2.5") [†]
DIE OPENING	Ø + 1.6"	Ø + 1.3"	Ø + 1.6"
90° FITTINGS	2"	2"	1" 1/4*
STANDARD VOLTAGE	24V / 12V D.C.	12V / 24V D.C.	12V D.C.
MOTOR POWER	2,5 kw (3.4 Hp) (12V) 4 kw (5.3 Hp) (24V)	1.6 Kw (2.1 Hp)	2.1 Kw (2.82 Hp)
DIMENSIONS LxWxH	26.4"x16.6"x30"	20.6"x17.2"x27.8" (12V) 26.5"x17.2"x27.8" (24V)	22.6"x20.9"x17.7"
WEIGHT WITHOUT OIL	639 Lbs	434 Lbs (12V) 485 Lbs (24V)	202 Lbs
OIL (NOT INCLUDED)	10 Lt. (2.5 US gal)	10 Lt. (2.5 US gal)	8.5 Lt. (2 US gal)
CYLINDER	-	-	SINGLE EFFECT

ACCESSORIES - ACCESSORI			
	H135	H130	H83/E
DISPENSER + PATENTED QUICK CHANGE			
PORTABLE DISPENSER + STANDARD QUICK CHANGE			
BASE			
CLEANING AND MAINTENANCE KIT			

ALSO AVAILABLE WITH SEPARATE POWER PACK



Diameter (mm) ▶	10	12	14	16	19	22	25	29	34	38	42	46	50	54	58	63	69	73
	DIES LENGTH (mm)																	
H135 24V - H130 12V	60	60	60	60	60	60	60	70	70	85	85	95	95	95	95	100	100	100
H83/E 12V	60	60	60	60	60	60	60	70	70	85	85	85	-	-	-	-	-	-

* WITH SPECIAL DIES Ø 54 MM UPON REQUEST - • WITH SPECIAL DIES
ALL CAPACITIES INDICATED DEPEND ON THE KIND OF FITTING USED

Product specifications could be modified without prior notice.